

Product Brief

WIB2G Module

April 2018, v1.1

Copyright © Inovatink


WWW.INOVATINK.COM

INOVATINK RESERVES THE RIGHT TO CHANGE PRODUCTS, INFORMATION AND SPECIFICATIONS WITHOUT NOTICE. Products and specifications discussed in this documents are strictly for reference purposes only. All information discussed here is provided on an "AS IS" basis, without warranties of any kind. This document and all information discussed here remain the sole and exclusive property of Inovatink. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppel or other-wise. Inovatink products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where product failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply. For updates or additional information about Inovatink products, contact Inovatink at info@inovatink.com. All brand names, trademarks and registered trademarks belong to their respective owners.

INOVATINK, 2018

General Information

WIB2G is a Smart IoT Module that enables out-of-the-box Cloud services and data analytics to silo IoT application developers and smart product manufacturers. The module synergizes enterprise-grade, secure WiFi and Bluetooth connectivity, global GPRS based connectivity, high performance dual core processor, rich set of analog/digital/communication peripherals and robust and compact design. WIB2G is optimized for cost and fast integration into manufacturer’s products. WIB2G Smart IoT Module comes with an easy to use SDK with all of the common IoT functions such as management, security, computation, diagnostics and Cloud communication.

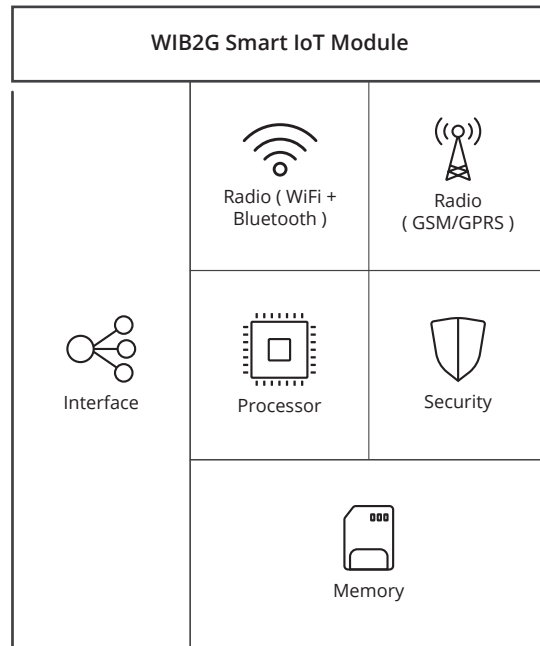

WIB2G Module Architecture

Key Benefits

- Low Cost
- Zero Touch Setup
- Fast Integration
- Fully Certified
- Day One Cloud Connectivity

Applications

WIB2G can be integrated into original equipment manufacturer products in areas such as;

- Logistics
- Industrial Equipment
- Consumer Electronics
- Medical Equipment
- HVAC Monitoring and Remote Control
- Smart City
- Security Devices
- Fleet Management



WIB2G Module

Features

Hardware Features	
Processor	
Microcontroller	240 MHz Dual Core Microcontroller with 600 DMIPS
Security Features	Secure Boot, Flash Encryption, Crypto-Acceleration
Radio	
Bluetooth	Classic BR/EDR and Bluetooth v4.2
WiFi	WiFi Certified 2.4GHz 802.11 b/g/n/e/i (802.11n up to 150 Mbps)
RF certification	FCC/CE/IC
GSM/GPRS	850/ 900/ 1800/ 1900 MHz
Supply	
Supply (Dual)	3.3V & 4V
Current Specs	500mA max, 200mA avg (3.3V) & 1500mA max, 500mA avg (4V)
Interfaces	
Digital & Analog	GPIO, PWM, ADC, DAC
Communication	UART, SPI, I2C, I2S
Auxiliary	RGB LED, Reset Button, Programmable Button
Mechanical	
Dimensions (mm)	63.25mm L x 30mm W x 6mm H
Antenna	PCB (BT & WiFi), IPEX quadband external (GPRS)
Software Features	
SDK	
Client Communication	UART, SPI
Client Implementation	Misra C, C++, Python
Security	
WiFi	WPA/WPA2/WPA2-Enterprise/WPS
Encryption	AES 128/192/256, RSA/ECC/HASH (SHA-2)
Connectivity	
WiFi Mode	Station/SoftAP/SoftAP+Station/P2P
Internet Protocols	IPv4, IPv6, TCP/UDP/HTTP/FTP/MQTT/CoAP
Bluetooth Stack	Bluetooth v4.2 BR / EDR and BLE
Out-of-the-Box Features	
Server Authentication	SSL, TLS or custom
Provisioning	using WiFi, BT or GPRS (auto)
Module OTA Update	Automatic, WiFi/GPRS based
Client OTA Update	On demand
Cloud	Inovatink Cloud / C2C API

